

MODULE-POWERTRAIN CONTROL C3

Kabelbaum Familie: Powertrain

Kavitäten: 38

Farbe: NATURAL

Geschlecht: FEMALE


Teil Beschreibung: 9-1326728-8

Engineering Name: Mod_PCM_a_c_36L_Phoenix

Stecker Nr: D3838C

Option: Standard

Verfügbare Ansichten: Lage Ansicht

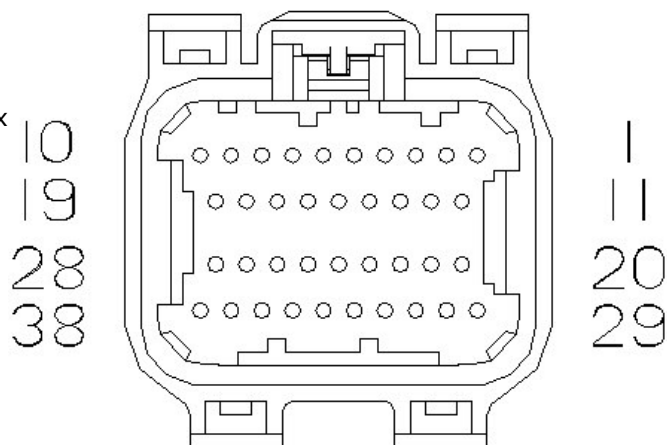

Pin	Schaltkreis	Kabelfarbe	Drahtstärke	Funktion	Option
1	T110	DG/YL	20	VACUUM PUMP RELAY CONTROL	
2	N0	NA	0	NO CONNECT	
3	K51	BR/WT	18	ASD RELAY CONTROL	
4	N0	NA	0	NO CONNECT	
5	N0	NA	0	NO CONNECT	
6	N0	NA	0	NO CONNECT	
7	K855	VT/PK	18	5 VOLT SUPPLY	
8	G62	VT/YL	20	OIL PRESSURE SOL CONTROL	
9	K299	BR/WT	18	O2 1/2 HEATER CONTROL SUPPLY	
10	K399	BR/GY	18	O2 2/2 HEATER CONTROL	
11	C13	LB/OR	18	A/C CLUTCH CONTROL	
12	N0	NA	0	NO CONNECT	
13	N0	NA	0	NO CONNECT	
14	B16	LB/DG	18	BRAKE SIGNAL 2	
15	V937	VT/BR	18	S/C SWITCH GROUND	
16	K167	BR/YL	18	APP SENSOR GROUND 1	
17	K400	BR/VT	18	APP SENSOR GROUND 2	
18	V38	VT/OR	18	S/C SIGNAL 2	
19	F342	BR/WT	16	ASD CONTROL OUTPUT	
20	K52	DB/WT	18	EVAP PURGE CONTROL	
21	N0	NA	0	NO CONNECT	
22	N0	NA	0	NO CONNECT	
23	B15	DG/WT	18	BRAKE SIGNAL 1	
24	N0	NA	0	NO CONNECT	
25	K23	BR/WT	18	APP SIGNAL 1	

Pin	Schaltkreis	Kabelfarbe	Drahtstärke	Funktion	Option
26	T44	YL/DG	18	AUTOSTICK DOWNSHIFT SIGNAL	
27	T5	DG/YL	18	AUTOSTICK UPSHIFT SIGNAL	
28	F342	BR/WT	16	ASD CONTROL OUTPUT	
29	K70	DB/BR	18	EVAP PURGE SOL SIGNAL	
30	N0	NA	0	NO CONNECT	
31	N0	NA	0	NO CONNECT	
32	N0	NA	0	NO CONNECT	
33	G224	VT/YL	20	EOT SIGNAL	
34	V37	VT	18	S/C SIGNAL 1	
35	K107	VT/WT	18	ESM SIGNAL	
36	K29	WT/BR	18	APP SIGNAL 2	
37	K31	BR	18	FUEL PUMP CONTROL	
38	T752	DG/OR	18	STARTER RELAY CONTROL	